

## 50 GPM Series

Stainless Steel 4" Hi-Flo Submersible Pumps



### APPLICATIONS

**Water Systems...**for residential, industrial, commercial, multiple housing, and farm use.

### SPECIFICATIONS

**Discharge:** 300 grade stainless steel with 2" NPT Threads

**Top Bearing:** Nylatron®

**Top Bearing Journal:** 300 grade stainless steel

**Diffuser Assembly:** Noryl® (20% glass filled)

**Impellers:** Noryl (20% glass filled)

**Bowls:** Noryl (20% glass filled)

**Diffuser Bearing:** Nylatron

**Diffuser Bearing Journal:** 300 grade stainless steel

**Shaft:** 300 grade stainless steel, 7/16" hex stock

**Coupling:** 300 grade stainless steel

**Shell:** 300 grade stainless steel

**Motor Adapter:** 300 grade stainless steel

**Suction Screen:** 300 grade stainless steel

**Cable Guard:** 300 grade stainless steel

**Fastener:** 300 grade stainless steel

### FEATURES

**Discharge:** Heavy-duty 300 grade stainless steel construction provides smooth water passage to column pipe. Large wrench flats and rope hole.

**Top Bearing:** Self-lubricated top bearing ensures long bearing life.

**Impellers:** 20% glass-reinforced Noryl to resist abrasives and provide smooth water passage for minimal friction loss.

**Diffuser Bearing:** Bearings at each stage provide radial protection and stability, and excellent resistance to sand damage.

**Motor Bracket:** 300 grade precision cast stainless steel. Incorporates an efficient hydraulic design for maximum volume and access to motor mounting nuts.

**Shaft:** 300 grade "treated" stainless steel pump shaft is corrosion-resistant. The hex shape offers generous impeller drive surfaces.

**Motor Coupling:** Pressed-on, sintered 300 grade stainless steel for maximum corrosion resistance provides trouble-free transfer of power between motor and pump shaft.

**Shell:** Heavy-gauge, 300 series stainless steel pump shell is durable and offers high corrosion resistance.

**Intake Screen:** 300 series stainless steel material offers maximum corrosion resistance and protects against damaging solids entering the pump.


The 50 GPM Stainless Steel 4" High-Flo Submersible Pumps deliver efficient and dependable performance even in rough, aggressive water. New stack design delivers better efficiency and head per stage than previous model.

# 50 GPM Series

Stainless Steel 4" Hi-Flo Submersible Pumps

**PUMP PERFORMANCE**

PEI (CL) = 0.85

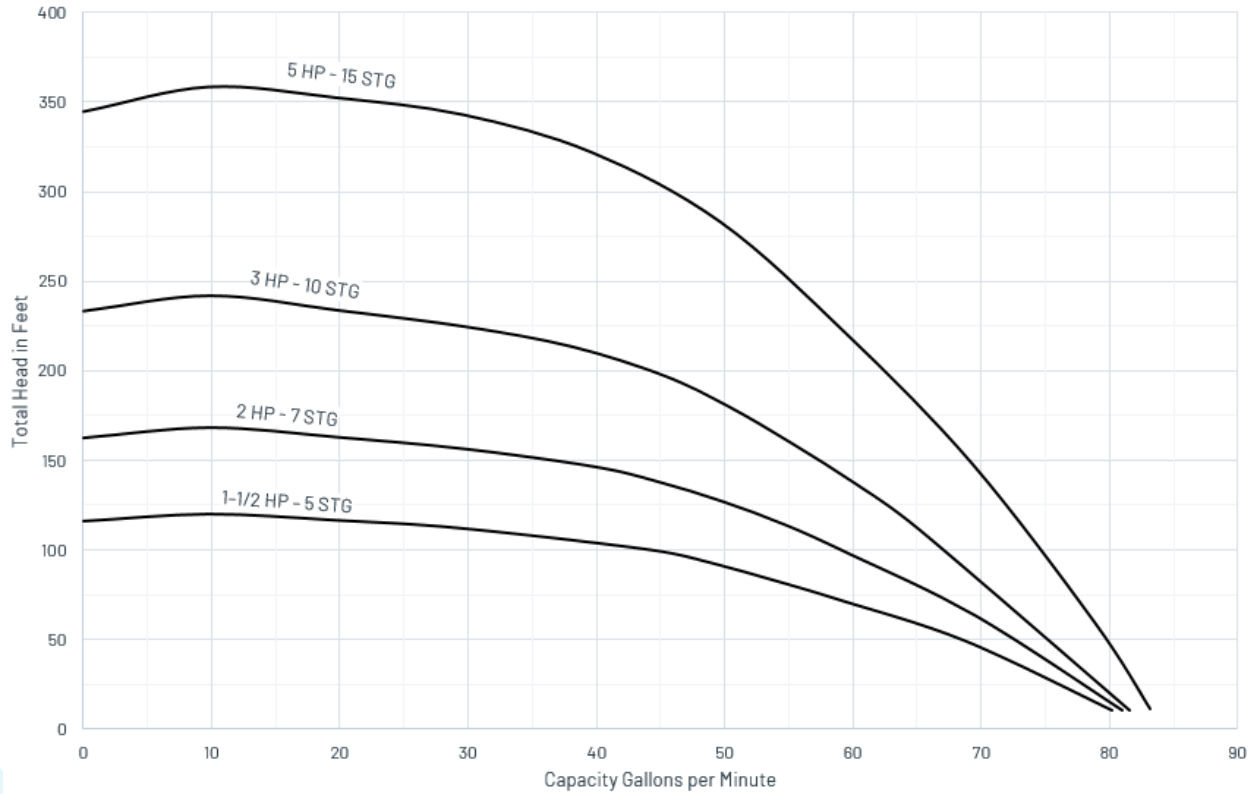

Tested and rated in accordance with Water Systems Council Standards.

Pumps installed with a Pro-Source<sup>®</sup> tank require a 100 PSI relief valve. Pumps installed with a conventional tank require a 75 PSI relief valve. Relief valve must be capable of relieving entire flow of pump at relief pressure. Check valve sold separately.

# 50 GPM Series

Stainless Steel 4" Hi-Flo Submersible Pumps

PUMP PERFORMANCE (Capacity in gallons per minute)																			
HP	PSI	PUMPING DEPTH IN FEET															SHUT-OFF HEAD		
		20	40	60	80	100	125	150	175	200	250	300	350	450	550	650	700	FEET	PSI
1-1/2	0	-	-	64	56	43												116	50
	20	62	52	37															
	30	50	34																
	40	48	30																
	50	25																	
	60																		
2	0	-	-	65	59	50	37											164	71
	20	-	64	57	50	39													
	30	63	56	49	38														
	40	55	47	35															
	50	45	33																
	60	30																	
3	0	-	-	-	-	67	63	57	51	43								235	101
	20	-	-	66	62	58	52	45	34										
	30	-	66	62	57	53	45	35											
	40	65	61	57	52	46	36												
	50	61	56	51	45	37													
	60	55	50	44	35														
5	0	-	-	-	-	-	-	69	66	63	55	45	26					346	150
	20	-	-	-	-	-	66	63	59	56	46	29							
	30	-	-	-	-	67	63	60	56	52	40								
	40	-	-	-	66	64	60	56	52	47	31								
	50	-	-	66	63	61	57	52	47	41									
	60	-	66	63	60	57	53	48	42	33									


**CAUTION: DO NOT** use pump at flow rates indicated by the symbol '-'. To do so can cause premature failure of unit. Pump warranty void when failure occurs under these conditions.

## ORDERING INFORMATION

MOTOR TYPE	HP	STGS.	PH	VOLT	PUMP END			MOTOR		CONTROL BOX		
					CATALOG NUMBER	LENGTH INCHES*	WEIGHT POUNDS*	CATALOG NUMBER	WEIGHT POUNDS*	CATALOG NUMBER	WEIGHT POUNDS*	
2 WIRE	1.5	5	1	230	L50P4FH-05	18-3/4	11	P42B0015A2	29			
			1	230	L50P4FH-05	18-3/4	11	P43B0015A2	27	SMC-CR1521	7	
			3	230	L50P4FH-05	18-3/4	11	P43B0015A3	23			
				3	460	L50P4FH-05	18-3/4	11	P43B0015A4	23		
	3 WIRE	2	7	1	230	L50P4GH-05	24-1/8	16	P43B0020A2	31	SMC-CR2021	7
				3	230	L50P4GH-05	24-1/8	16	P43B0020A3	27		
				3	460	L50P4GH-05	24-1/8	16	P43B0020A4	27		
		3	10	1	230	L50P4HH-05	32	19	P43B0030A2	40	SMC-CR3021	7
				3	230	L50P4HH-05	32	19	P43B0030A3	32		
				3	460	L50P4HH-05	32	19	P43B0030A4	32		
	5	15	3	230	L50P4JH-05	45-3/8	24	P43B0050A2	70	SMC-CR5021	8	
			3	460	L50P4JH-05	45-3/8	24	P43B0050A3	55			
3			460	L50P4JH-05	45-3/8	24	P43B0050A4	55				

\*Length and Weight are approximate. NOTE: Pump end and motor purchased separately. Check valve sold separately.

## OUTLINE DIMENSIONS

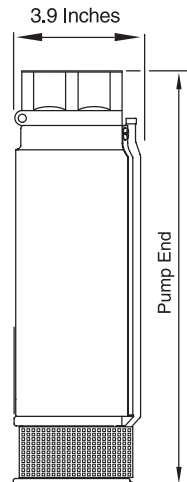

Dimensions (in inches) are for estimating purposes only.

For lengths, refer to Ordering Information table.



293 Wright Street,  
Delavan, WI 53115  
USA  
Ph: 888.782.7483  
Orders Fax: 800.426.9446

490 Pinebush Road  
Unit 4  
Cambridge, Ontario N1T 0A5  
Canada  
Ph: 800.363.7867  
Orders Fax: 888.606.5484

[PENTAIR.COM/STA-RITE](http://PENTAIR.COM/STA-RITE)

Noryl® is a registered trademark of SABIC Global Technologies B.V.  
Nylatron® is a registered trademark of Techmer Lehvoss Compounds, LLC

All indicated Pentair trademarks and logos are property of Pentair. Third party registered and unregistered trademarks and logos are the property of their respective owners. Because we are continuously improving our products and services, Pentair reserves the right to change specifications without prior notice. Pentair is an equal opportunity employer.

S13302WS (07/20/20) ©2020 Pentair. All Rights Reserved.