

BERKELEY® ABOVE GROUND VFD CONSTANT PRESSURE SYSTEMS



SYSTEM FEATURES/BENEFITS:

- ▶ For use as a booster system for domestic or light commercial applications
- ▶ PENTEK INTELLIDRIVE™ changes pump speed to maintain constant pressure
- ▶ Can be used with a smaller supply tank
- ▶ Uses single-phase input to power three-phase pumps.

NOTE: For above ground applications, ensure distance between motor and PENTEK INTELLIDRIVE is 25 feet or less.



1 PENTEK INTELLIDRIVE

- ▶ Water pressure management system that maintains constant pressure output regardless of fluctuating demand
- ▶ Extends life of pump and motor
- ▶ Keypad with LCD display; real time status indicator; local pump control

2 CP/CB SERIES CENTRIFUGAL PUMP SELECTION

- ▶ 1/2 to 2-1/2 HP High head and medium head models, with heavy duty motor, easy service design and four-position discharge
- ▶ Easy serviceability
- ▶ Drain port for easy winterizing

BERKELEY®


ABOVE GROUND VFD CONSTANT PRESSURE SYSTEMS

Selection Chart

PSI BOOST	2-10 GPM	20 GPM	30 GPM	40 GPM	50 GPM	60 GPM	70 GPM	80 GPM
20	1	1	2	3	4	4	5	6
25	1	1	2	3	4	5	5	6
30	1	2	3	3	4	5	6	-
35	2	2	3	4	5	6	-	-
40	2	3	4	4	6	-	-	-
45	3	3	4	5	6	-	-	-
50	-	4	5	6	-	-	-	-
55	-	-	6	-	-	-	-	-
60	-	-	-	-	-	-	-	-

MODEL	CATALOG NUMBER	HP	SUCTION	DISCHARGE	RECOMMENDED DRIVE	
1	CPIXPHS	S39517	1/2HP	1-1/4"	1"	PID10
2	CPIXPHS	S37519	3/4HP	1-1/4"	1"	PID10
3	CPIXPHS	S39521	1HP	1-1/4"	1"	PID10
4	JHF3	S39523	1-1/2HP	1-1/4"	1"	PID20
5	JHG3	S39525	2HP	1-1/2"	1-1/4"	PID20
6	JHHG3	S39527	2-1/2HP	2"	1-1/2"	PID50

Suggested Installation for Above Ground or Submersible Pump Systems

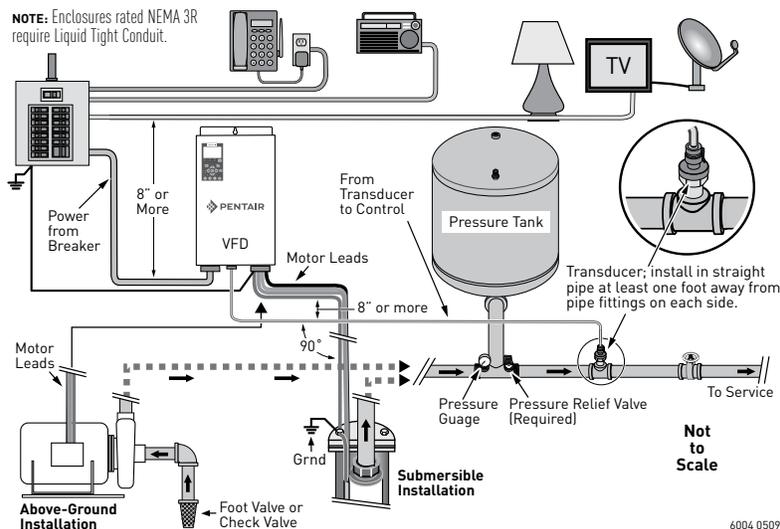

USA
 293 WRIGHT STREET, DELAVAN, WI 53115 WWW.BERKELEYPUMPS.COM
 PH: 888-237-5353 ORDERS FAX: 800-321-8793

CANADA
 269 TRILLIUM DRIVE, KITCHENER, ONTARIO, CANADA N2G 4W5
 PH: 888-363-7867 ORDERS FAX: 519-748-2553

Because we are continuously improving our products and services, Pentair reserves the right to change specifications without prior notice.